

[accurat]

SPORT

GEL TECHNOLOGY **LCD**



YTX20L-BS

20 Ah | 12 V | 290 A




Electrical Specifications

Nominal voltage	12 V
Nominal capacity (25 °C)	20 Ah @10 hrs
CCA -18 °C	290 A


Retention of Charge During Storage @ 25 °C		
1 month	97 %	Directly mounted
3 months	90 %	Directly mounted
6 months	80 %	Constant voltage: 14.4 V Limit current: 4 A Charging time: 2 - 3 hrs
12 months	40 %	Constant voltage: 14.4 V Limit current: 4 A Charging time: 4 - 6 hrs

Mechanical Specifications


Measurements (L x W x H)	175 x 87 x 155 mm
Approx. weight	6.2 kg
Storage status	Wet
Cover	ABS
Terminal	Z2 (Cu)
Container bottom	ABS
Positive plate	PbO ₂
Negative plate	Pb
Separator	AGM
Electrolyte	Diluted sulphuric acid
Safety valve	Rubber
Way of sealing	Epoxy Resin



Discharge Current 25 °C

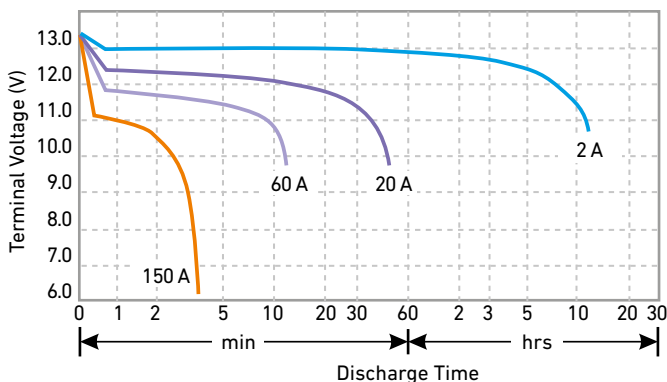

Residual Capacity

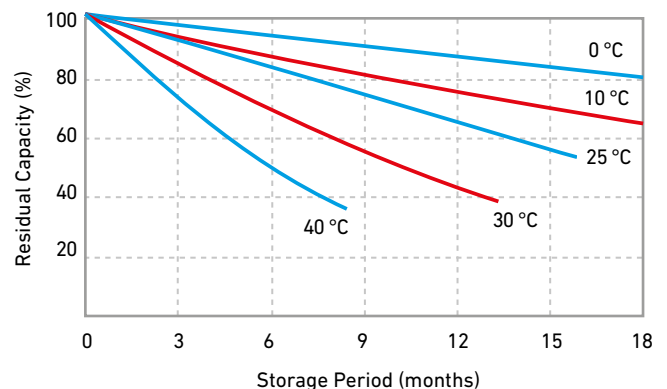

batterium GmbH | Robert-Bosch-Straße 1
71691 Freiberg am Neckar | Germany
T: +49 7141 / 560 90 40