



YTX7L-BS

6 Ah | 12.8 V | 160 A


Electrical Specifications

Nominal voltage	12.8V
Nominal capacity (25 °C)	6Ah @10 hrs / 78Wh
CCA -18 °C	160A

Retention of Charge During Storage @ 25 °C		
1 month	96%	Directly mounted
3 months	87%	Directly mounted
6 months	74%	Constant voltage: 14.4V Limit current: 1.5A Charging time: 0.5 to 1 h
12 months	50%	Constant voltage: 14.4 V Limit current: 1.5A Charging time: 1 to 2h

Mechanical Specifications


Measurements (L x W x H)	113 x 70 x 130 mm
Approx. weight	1.16kg
Terminal Material	Cu
Terminal Type	LM1
Cover	ABS
Container bottom	ABS
Positive plate	LiFePO ₄
Negative plate	C
Separator	PP or PE
Electrolyte	LiPF ₆ + Carbonic acid esters
Seal glue	Epoxy resin

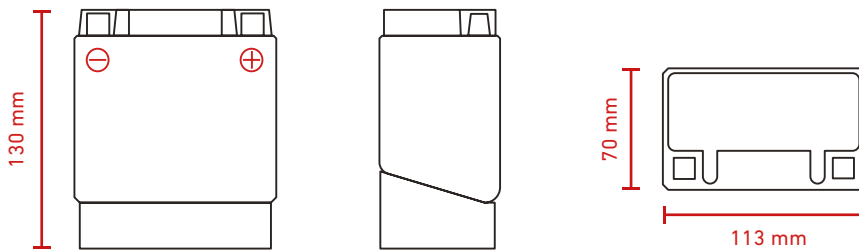

LiFePO₄
LITHIUM BATTERY



Discharge Current 25 °C

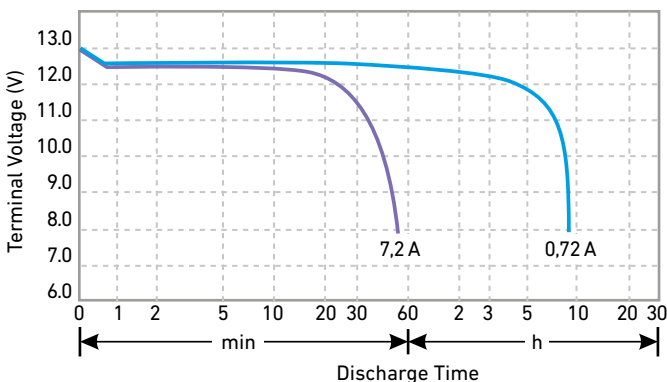

Residual Capacity

