

LC 125L

LiFePO₄ Battery | 12.8V | 125Ah | 1600Wh | Bluetooth Function



Electrical Specifications

Nominal Voltage	12.8V
Nominal Capacity	125Ah
Capacity Tolerance	± 4%
Capacity @ 25 A	300min
Energy	1600Wh
Resistance	≤ 30mΩ
Self Discharge	< 3% / month
Cell Type	LiFePO ₄

Discharge Specifications

Max. Continuous Discharge Current	100A
Peak Discharge Current	120A (30 ± 5s)
BMS Discharge Cut-Off Current	300A (2s)
Recommended Low Voltage Disconnect	10V
BMS Discharge Cut-Off Voltage	> 10V (2.5V per cell)
Reconnect Voltage	> 11.2V (2.8V per cell)
Short Circuit Protection	200 to 600 μs

Charge Specifications

Recommended Charge Current	≤ 60A
Maximum Charge Current	80A
Recommended Charge Voltage	14.6V
BMS Charge Cut-Off Voltage	15V (3.75V per cell)
Reconnect Voltage	< 14.4V (3.6V per cell)
Float Charge Voltage	13.8V
Maximum Batteries in Series	4


Mechanical Specifications

Measurements (L × W × H)	318 × 165 × 230 mm
Approx. Weight	15.0kg
Terminal Type	M8
Terminal Torque	9 to 11 N m
Case Material	ABS
Enclosure Protection	IP65

Temperatur

Discharge Temperature	-20 to 60°C
Charge Temperature	-30 to 45°C
Storage Temperature	-10 to 45°C
BMS High Temperature Cut-Off	65°C
Reconnect Temperature	50°C


Measurements

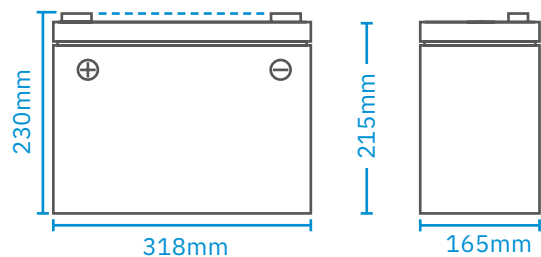


Compliance

Certifications	CE (Battery) UN38.3 (Battery) RoHS
Shipping Classification	UN 3480, CLASS 9


**Cycle Life vs. Depth of Discharge (DOD)
Discharge 0.5C / Charge 0.5C (25°C)**

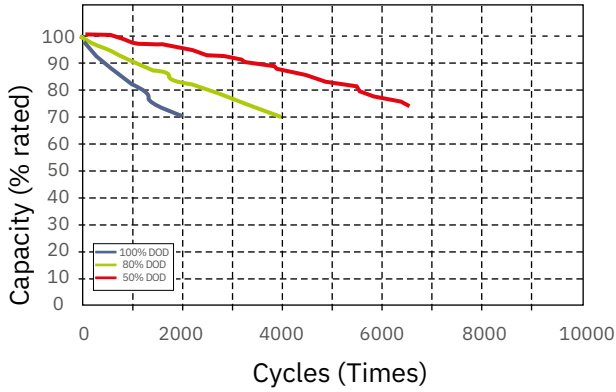


**Discharge Voltage Profiles at 0.5C Discharge Rate
(Various Ambient Temperatures)**

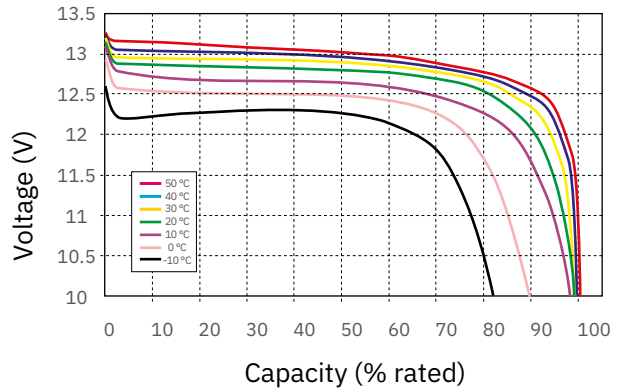


Discharge Voltage Profiles at Various Rates (25°C Ambient Temperature)

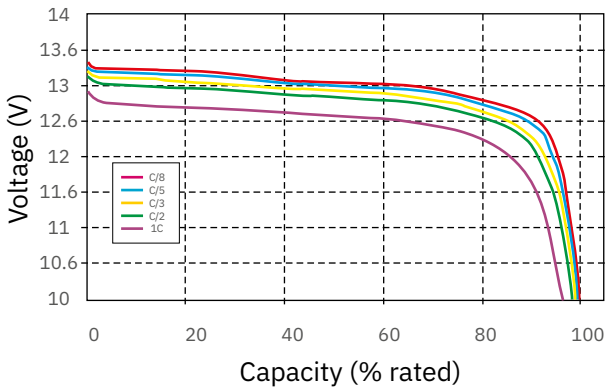

**Typical Voltage and SOC Profiles at 0.5C Charging
(25°C Ambient Temperature)**

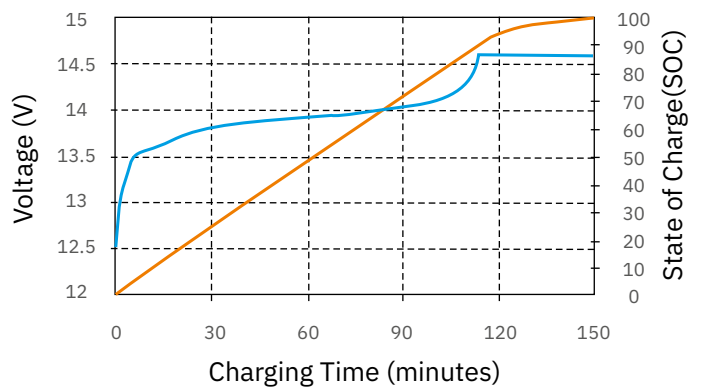

**Charging Characteristics
(0.5C at 20°C)**

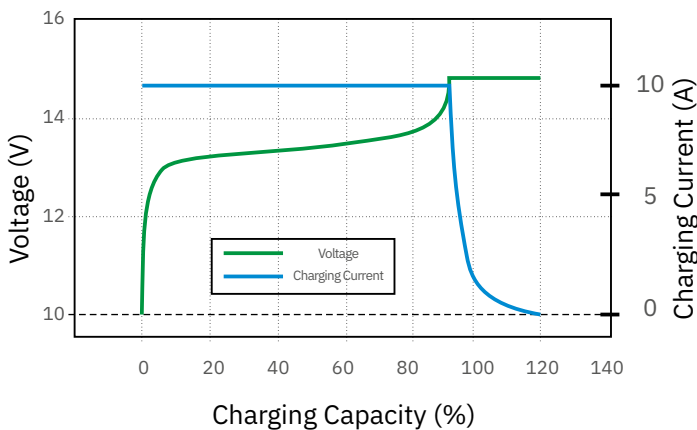

**Constant Power Discharge Characteristics
(25°C Ambient Temperature)**

