[accurat] SPORT POWER INSIDE

YB10L-B2

11 Ah | 12 V | 140 A

Electrical Specifications

Nominal voltage	12 V
Nominal capacity (25 °C)	11 Ah @10 hrs
CCA -10 °C	90 A
CCA -18 °C	140 A

Retention of Charge During Storage @ 25 °C		
1 month	97 %	Directly mounted
3 months	90 %	Directly mounted
6 months	80 %	Constant voltage: 14.4 V Limit current: 0.8 A Charging time: 2 to 3 h
12 months	40 %	Constant voltage: 14.4 V Limit current: 0.8 A Charging time: 4 to 6 h

Mechanical Specifications

Measurements (L × W × H)	135 × 90 × 145 mm
Approx. weight	3.65 kg
Storage status	Dry
Terminal Material	Pb
Terminal Type	G3
Cover	PP
Container bottom	PP
Positive plate	PbO_2
Negative plate	Pb
Separator	PE / Compound Fibre
Electrolyte	Diluted sulphuric acid
Safety valve	Rubber
Explosion plate	PP
Way of sealing	Heat sealing

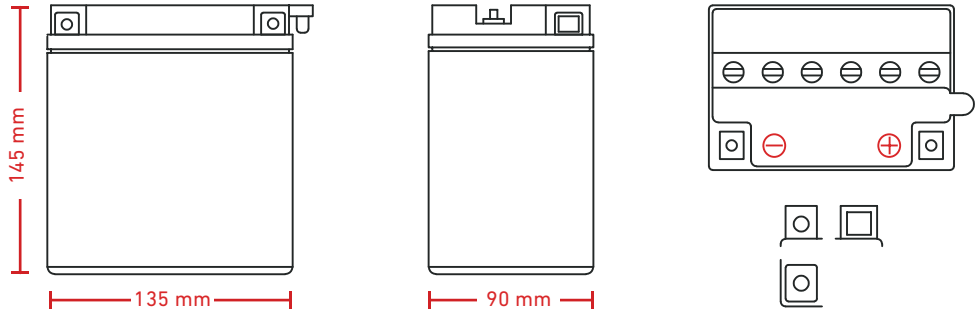

Discharge Current 25 °C

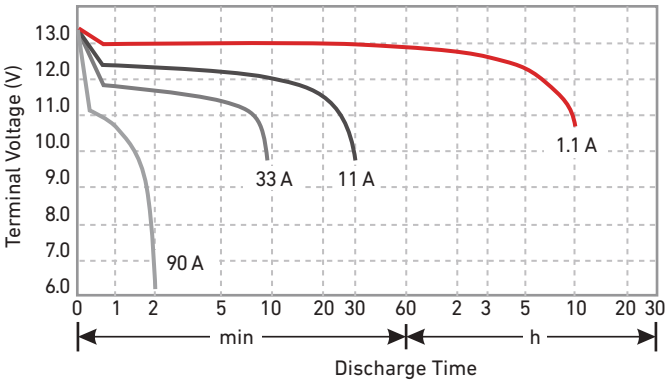

Residual Capacity

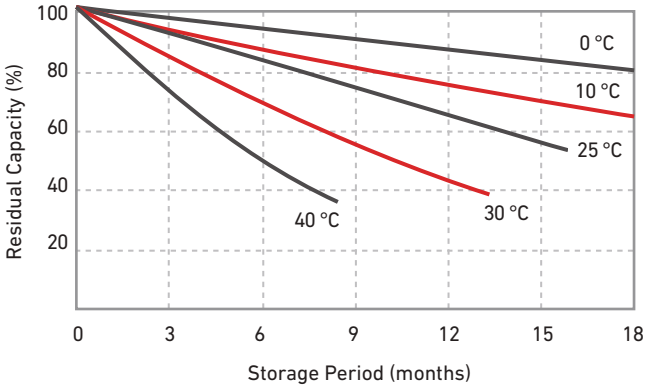

batterium GmbH | Robert-Bosch-Straße 1
71691 Freiberg am Neckar | Germany
T: +49 7141 / 560 90 40 | F: +49 7141 / 560 90 49